


NOTE:

1. Rating : DC 5V 10mA
2. Contact Resistance: 100mΩMAX
3. Insulation Resistance: 100MΩMIN
4. Soldering Temper: 260±5°/5s
5. Mechanical Life: 100,000 cycles
6. Ever Portion 80 ± 50 gf
7. Push Portion 205 ± 80 gf
8. Travel: -24° 0° +24°

SWITCH CONNECTOR

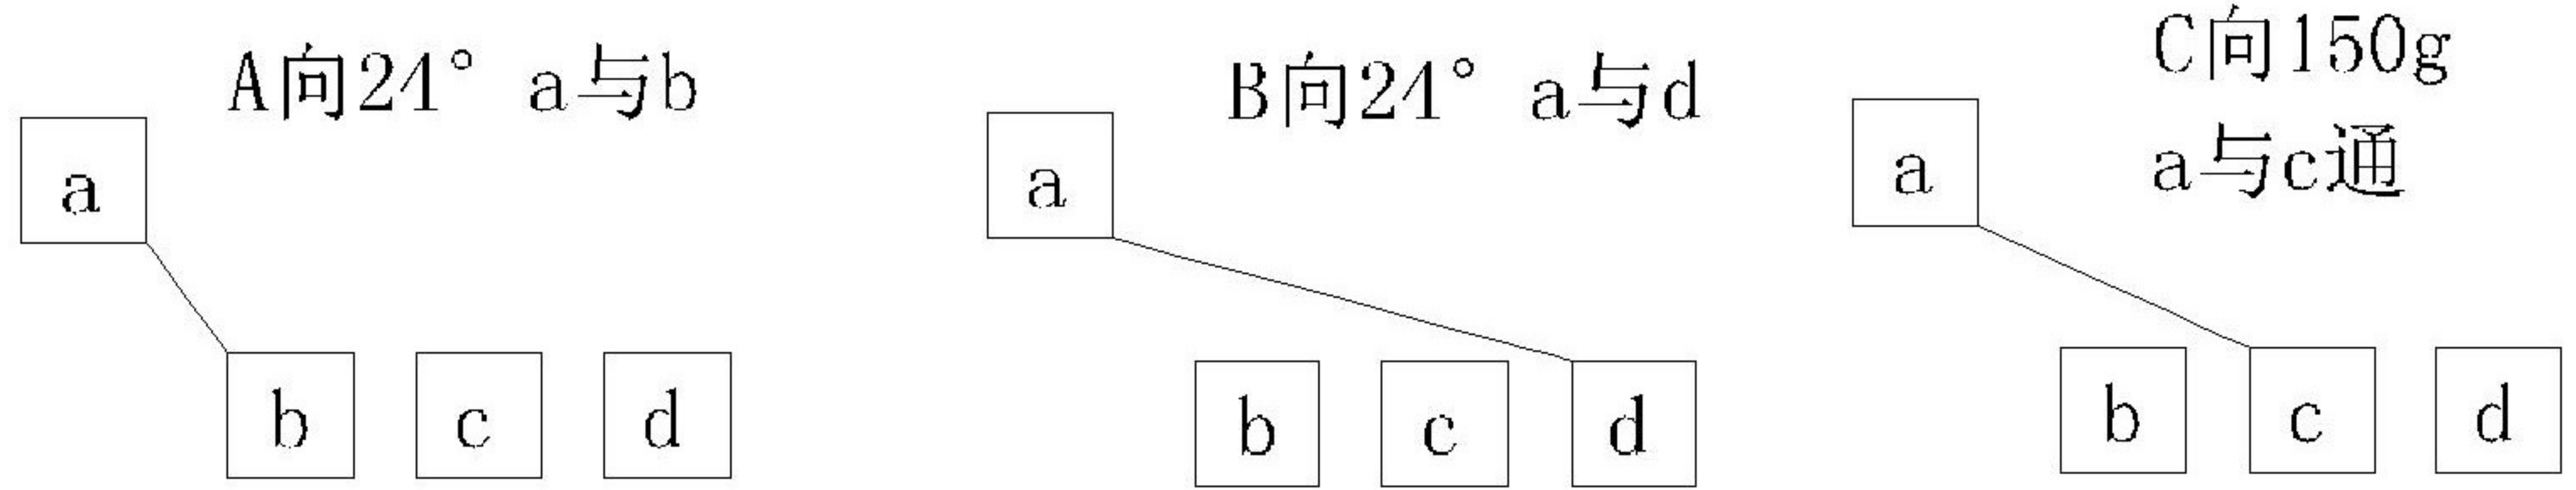

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Spring	—	1	SUS	Natural	—
④	Terminal	—	5	Phosphor Bronze	Plating silver	—
③	Cover	—	1	SUS	Natural	—
②	Base	—	1	LCP	Black	—
①	Keystoke	—	1	PPA	Black	—

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE: MULTIFUNCTIONAL SWITCHES		
ΔX					ANGLAR ±5°	DWN	DATE	VIEW:	PART NO.:		
ΔX					L ≤ 4 ±0.2	CHKD	DATE	UNIT: mm	DWG NO.:		
ΔX					4 < L ≤ 16 ±0.3	APPD	DATE	SIZE: A4	TM-2011		
					16 < L ≤ 63 ±0.4				WEIGHT	SHEET	REVISION
					L > 63 ±0.5				1.0g	1/1	A0
						KXB INDUSTRIAL PRECISION CO., LIMITED					